

Data SheetSuper Noise-Lock® Steel Acoustic Door






Overview

- Field verified performance rating
- Manufactured to custom sizes
- Available with Noise-Lock® (man doors) within as means of egress
- Available as swing (single, double, tri & quad-leaf), horizontal slide (single slab or bi-parting) & vertical lift
- · Rugged steel construction
- Glazing options available
- Available with manual or electric operation
- Door leaf is 4" or 6" thick
- Used when door size exceeds 14' x 14'

Acoustic Rating

STC 50 (dB) to achieve minimum NIC 45 and STC 55 (dB) to achieve minimum NIC 50 once installed (subject to flanking).



Standard Features





Rated



Blast Resistance



Easy Access Flat Thresholds



Ballistic Ratings



Fire Rated

Overview


IAC Acoustics produces an engineered system complete with a leaf, acoustic seals, cam-lift hinges and hardware. Super Noise-Lock® doors are field-tested for performance. IAC Acoustics is renowned for quality, durability and guarantees in-field performance.

Hardware

IAC Acoustics Super Noise-Lock® doors are available with a number of standard and custom hardware options. Please contact your local IAC Acoustics office for further details.


Super Noise-Lock Swing Door Seal Detail

- Host Wall
- Cam-lift Hinge
- Seal "D" Bulb Seal/Compression

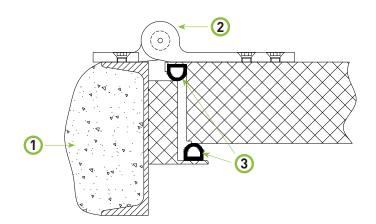

Super Noise-Lock Sliding Door Seal Detail

- Host Wall
- Wiper Seals
- Seal "D" Bulb Seal/Compression
- Acoustic Labyrinth

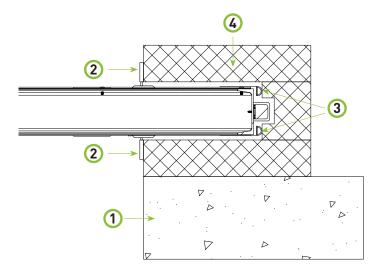

Performance Features

- Cam-lift hinges lower and seal the door to the floor eliminating the high maintenance of automatic drop seals
- System eliminates in-field grouting to achieve the specified acoustic performance with quick and clean installation